



WELCOME

Presented by



MD. SELIM KHALIFA

B.Sc. Engineering (CSE)

Junior Instructor (Computer)

Barisal Polytechnic Institute

E-mail: sk.aub608@gmail.com

Contact: 01797010726, 01937975918

Network Administration and Services (28572)

OSI model

Open System Interconnect that is OSI model is basically seven layer model which is developed in order to establish communication between two systems which are completely different in there hardware, software and internal architecture.

Let's take an example in our real life to demonstrate the OSI model. May be you have ever sent a mail to your friend, right? To do it, you have to follow these steps:


1. Write your letter
2. Insert it into an envelope
3. Write information about sender and receiver on that envelope
4. Stamp it
5. Go to the post office and drop it into a mail inbox

below:


From the example above, I want to imply we have to go through some steps in a specific order to complete a task. **It is also applied for two PCs to communicate with each other.** They have to use a predefined model, named OSI, to complete each step. There are 7 steps in this model as listed below:



When a device wants to send information to another one, its data must go from top to bottom layer. But when a device receives this information, it must go from bottom to top layer.

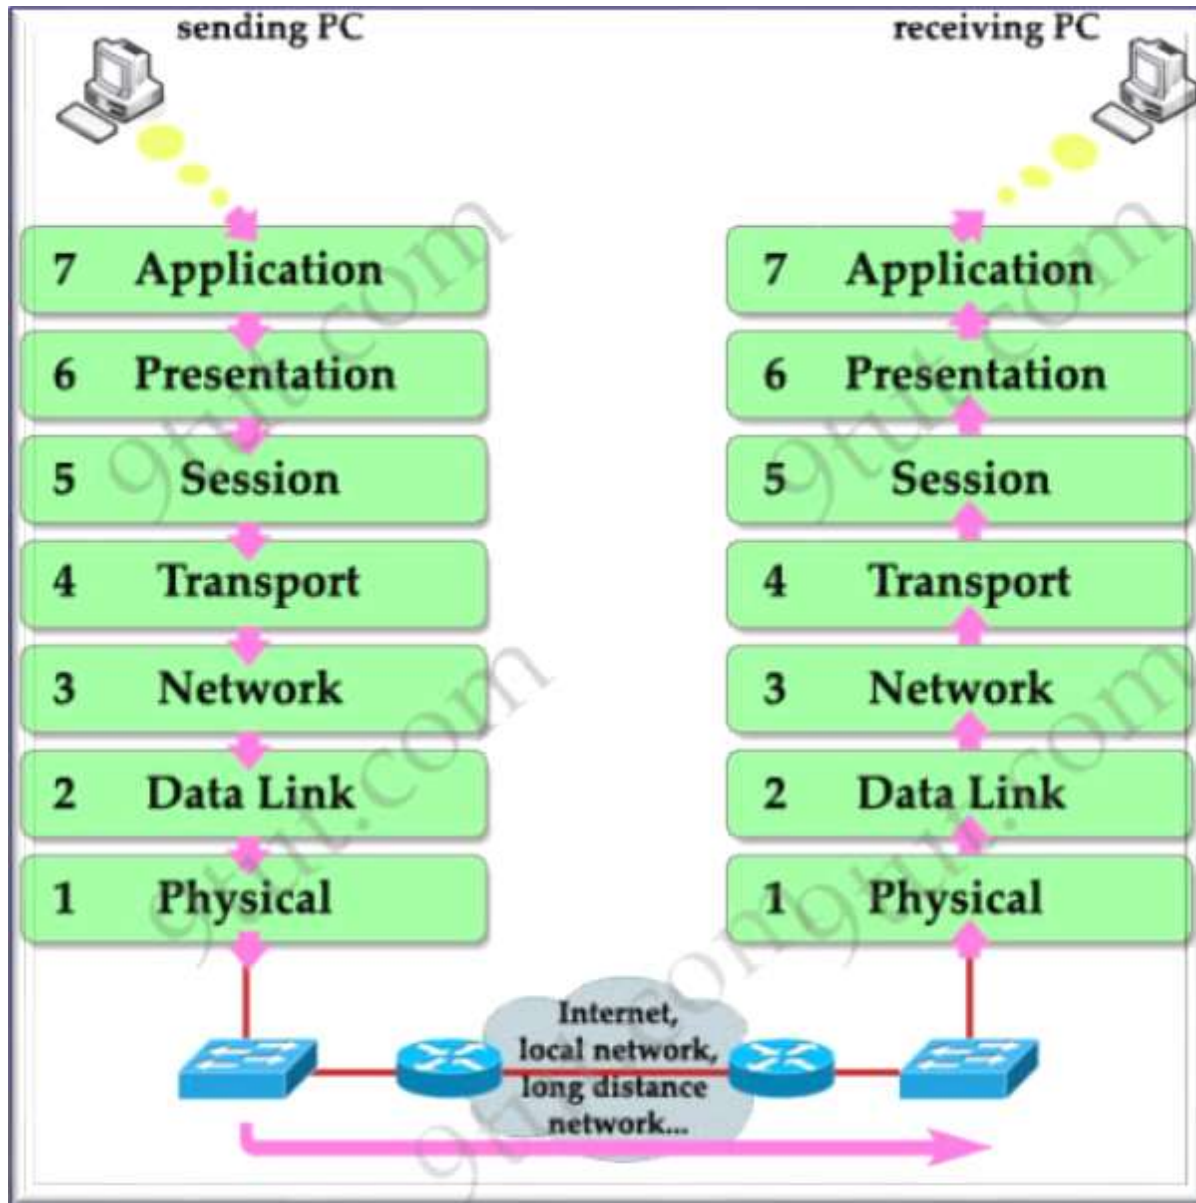

When the information goes down through layers (from top to bottom), a header is added to it. **This is called encapsulation because it is like wrapping an object in a capsule.** Each header can be understood only by the corresponding layer at the receiving side. Other layers only see that layer's header as a part of data.

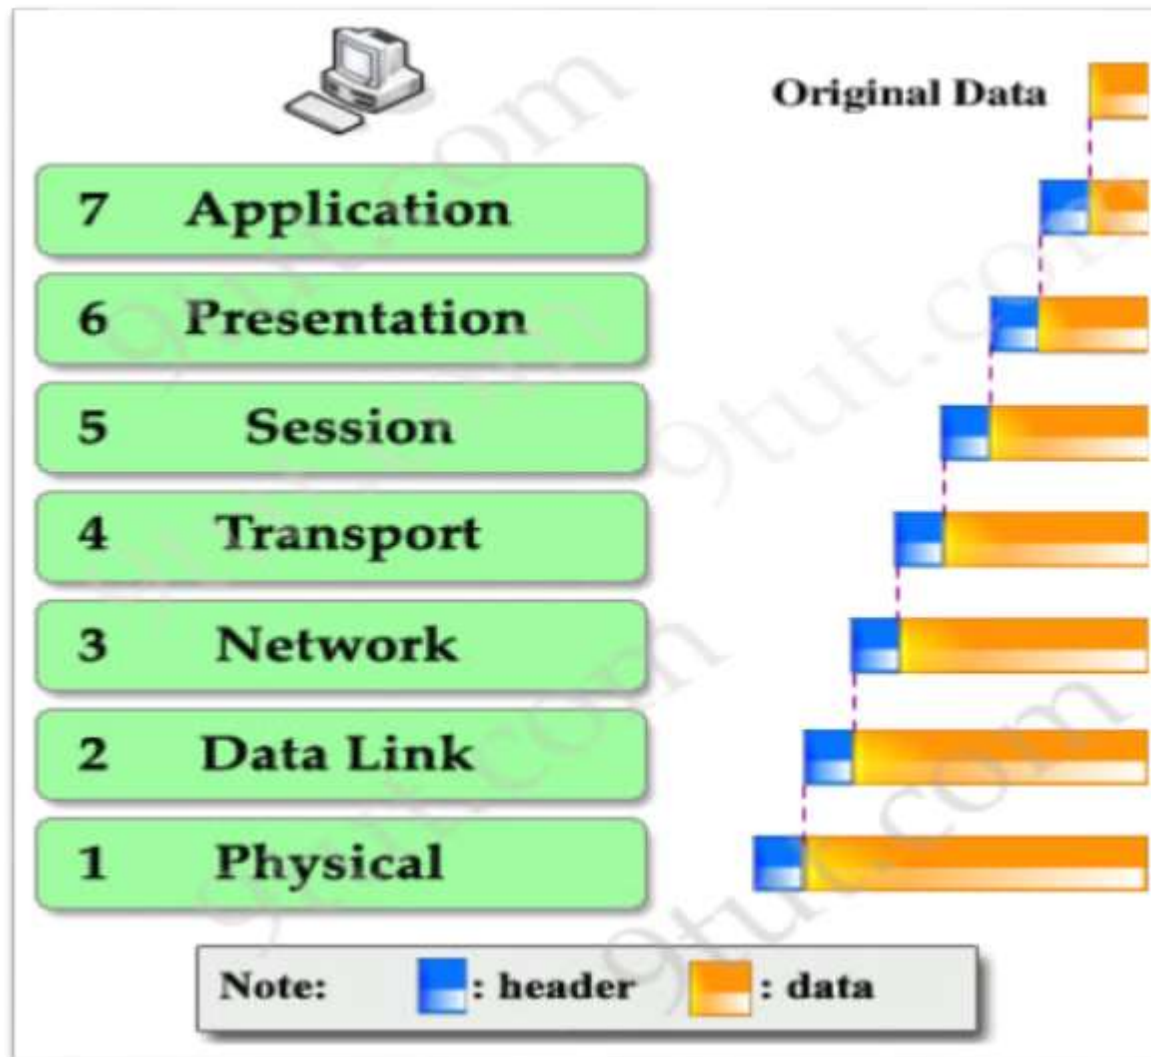

Understand each layer

Layer 7 – Application layer

This is the closest layer to the end user. It provides the interface between the applications we use and the underlying layers. But notice that the programs you are using (like a web browser – IE, Firefox or Opera...) do not belong to Application layer. Telnet, FTP, email client (SMTP), Hypertext Transfer Protocol (HTTP) are examples of Application layer.

Layer 6 – Presentation layer

This layer ensures the presentation of data, that the communications passing through are in the appropriate form for the recipient. In general, it acts as a translator of the network. For example, you want to send an email and the Presentation will format your data into **email format**. Or you want to send photos to your friend, the Presentation layer will format your data into **GIF, JPG or PNG...** format.

Layer 5 – Session layer

Layer 5 establishes, maintains and ends communication with the receiving device.

Layer 4 – Transport layer

This layer maintains flow control of data and provides for error checking and recovery of data between the devices. The most common example of Transport layer is Transmission Control Protocol (TCP) and User Datagram Protocol (UDP).

Layer 3 – Network layer

This layer provides logical addresses which routers will use to determine the path to the destination. In most cases, the logic addresses here means the IP addresses (including source & destination IP addresses).

Layer 2 – Data Link Layer

The Data Link layer formats the message into a *data frame*, and adds a header containing the hardware destination and source address to it. This header is responsible for finding the next destination device on a local network.

Notice that layer 3 is responsible for finding the path to the last destination (network) but it doesn't care about who will be the next receiver. It is the Layer 2 that helps data to reach the next destination.

This layer is subdivide into 2 sub-layers: logical link control (LLC) and media access control (MAC).

The LLC functions include:


- + Managing frames to upper and lower layers
- + Error Control
- + Flow control

The MAC sub layer carries the physical address of each device on the network. This address is more commonly called a device's MAC address. MAC address is a 48 bits address which is burned into the NIC card on the device by its manufacturer.

Layer 1 – Physical layer

The Physical Layer defines the physical characteristics of the network such as connections, voltage levels and timing.

To help you remember the functions of each layer more easily, I created a fun story in which Henry (English) wants to send a document to Charles (French) to demonstrate how the OSI model works.

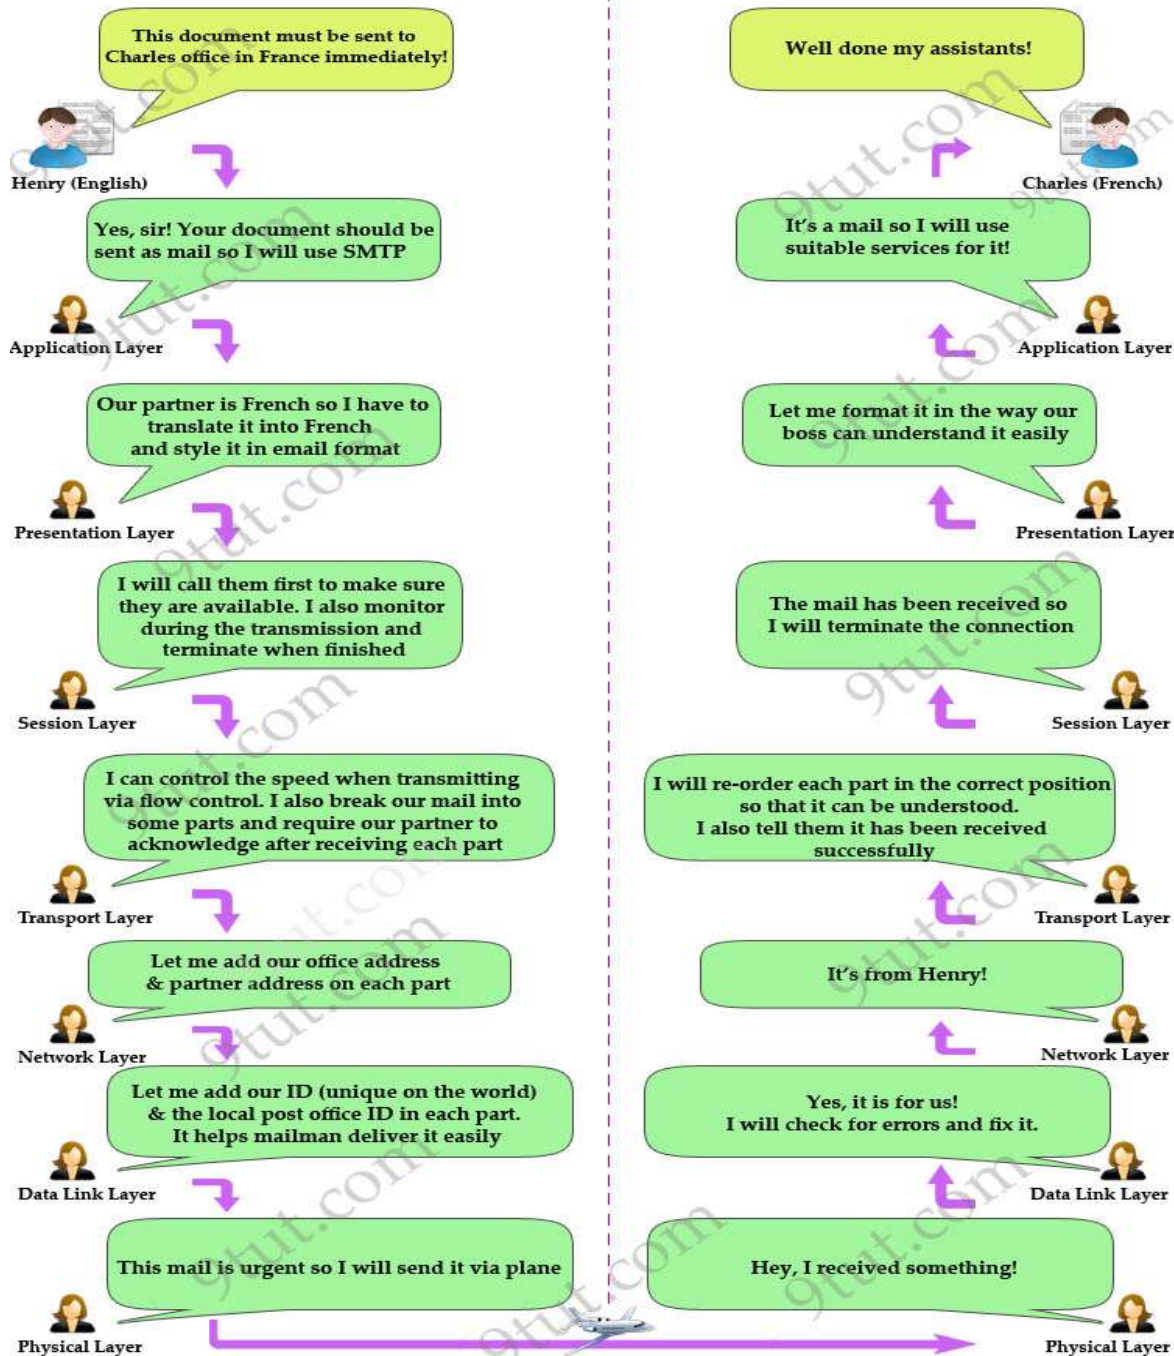

Lastly, I summarize all the important functions of each layer in the table below (please remember them, they are very important knowledge you need to know about OSI model):

Layer	Description	Popular Protocols	Protocol Data Unit	Devices operate in this layer
Application	+ User interface	HTTP, FTP, TFTP, Telnet, SNMP, DNS...	Data	
Presentation	+ Data representation, encryption & decryption	+ Video (WMV, AVI...) + Bitmap (JPG, BMP, PNG...) + Audio (WAV, MP3, WMA...)	Data	
Session	+ Set up, monitor & terminate the connection session	+ SQL, RPC, NETBIOS names...	Data	
Transport	+ Flow control (Buffering, Windowing, Congestion Avoidance) helps prevent the loss of segments on the network and the need for retransmission	+ TCP (Connection-Oriented, reliable) + UDP (Connectionless, unreliable)	Segment	
Network	+ Path determination + Source & Destination logical addresses	+ IP + IPX + AppleTalk	Packet/Datagram	Router
Data Link	+ Physical addresses Includes 2 layers: + Upper layer: Logical Link Control (LLC) + Lower layer: Media Access Control (MAC)	+ LAN + WAN (HDLC, PPP, Frame Relay...)	Frame	Switch, Bridge
Physical	Encodes and transmits data bits + Electric signals + Radio signals			

Many Thanks